

covrit[®]
SCREENING SYSTEMS


PLANKART[™]
**INFILL INSTALL
INSTRUCTIONS**

COV-INF-PLA

COVRIT® PLANKART™ INFILL INSTALLATION INSTRUCTIONS

For detailed instructions please visit our our website's resources section. To order a Covrit® Wall System for your next project, call 877.727.3367 or email contact@cityscapesinc.com.

INSTALLATION STEPS:

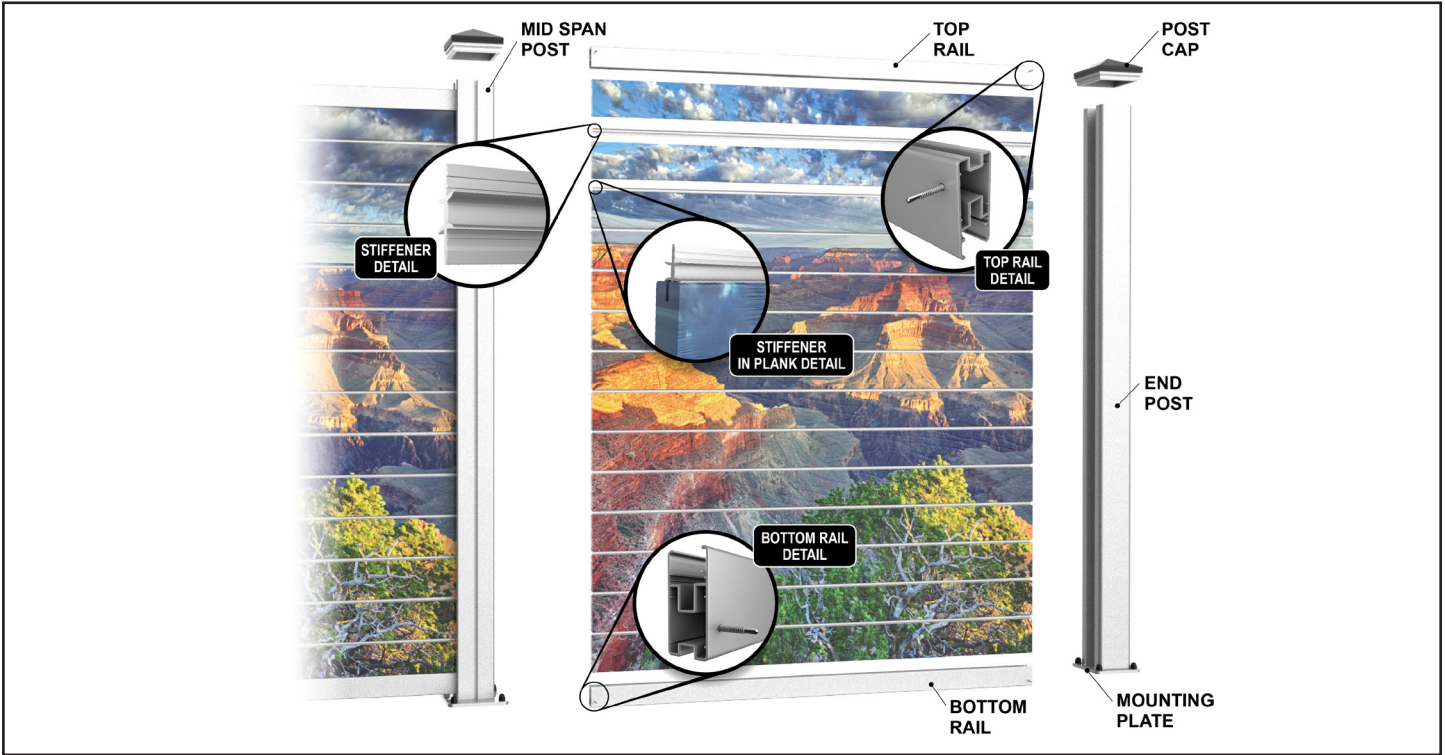


We recommend laying out the PlankArt™ wall prior to installing. PlankArt™ panels are position dependent so be sure to consult the submittal drawings and rendering to ensure proper placement of each piece.



1. Confirm the location and orientation of the PlankArt™ section with the Submittal Drawing. Be sure to have the art image ready before you start for successful installation of the PlankArt™.
2. Install **BOTTOM RAIL** between posts using #12-14 x 2 1/2" TEK screws and angle clips.

INSTALLATION STEPS CONTINUED:

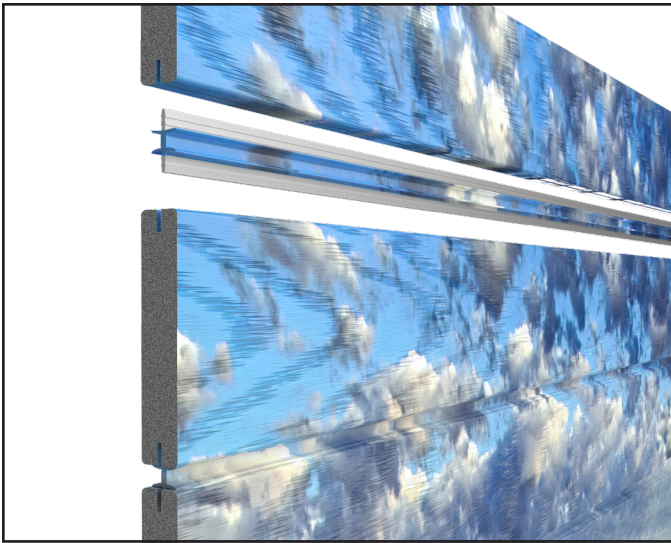


3. PlankArt™ boards in Mission (horizontal) orientation:

- 3.1. Locate the correct bottom board and insert into the **BOTTOM RAIL**. Fully seat board with a rubber mallet or dead blow hammer. Orientate image to correct side of wall.
- 3.2. Locate the first **STIFFENER** to board groove. Orientate the image to correct side of wall.
- 3.3. Continue building wall from bottom to top per your laid out PlankArt™.



4. PlankArt™ boards in Madison (vertical) orientation:

- 4.1. Locate the correct left most board to the post and **BOTTOM RAIL**. Fully seat board with a rubber mallet or dead blow hammer into **BOTTOM RAIL**. Orientate the image to correct side of wall.
- 4.2. Locate the correct first **STIFFENER** to board groove. Orientate the image to correct side of wall.

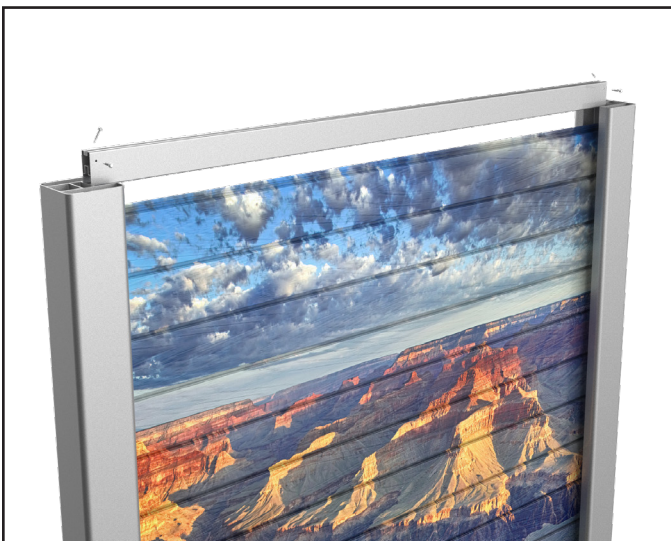

5. Install the **TOP RAIL** by aligning the large, lineal opening on top of the installed planks.
6. Secure **TOP RAIL** with #12-14 x 2 1/2" TEK Screws and angle clips.

To order a Covrit® Wall System for your next project, call 877.727.3367
or email contact@cityscapesinc.com

REPLACEMENT PARTS ORDERING

TO ORDER CALL 877-727-3367

Engineered Wood PVC Plank Infill Specs:

Woodgrain surface planks are 1" thick 100% cellular PVC. Frames and stiffeners are 6063 T6 extruded aluminum. Sherwin Williams 4000 Series Powder-Coated Components. Graphics are digitally printed with UV resistant Nazdar ink.

Affix™ Stiffener System:

Stiffeners are 6063 T6 extruded aluminum. Sherwin Williams 4000 Series Powder-Coated Components.

CityScapes®

PROFESSIONAL-GRADE PRODUCTS
READY TO MAKE YOUR NEXT PROJECT PERFECT

FOLLOW US | [f](#) [@](#) [p](#) [in](#)

877.727.3367  CITYSCAPESINC.COM

envisor®
SCREENING SYSTEMS

covrit®
SCREENING SYSTEMS

ToughGate™
GATES & DOORS

nature
screen®

Planx®
PLANTERS

ECLIPSE™
PRIVACY SCREENS

SANCTUM®
cabanas

Marquee
CANOPIES

ARCHITECTURAL
signage

custom
SOLUTIONS